


DA35 电鼓音箱

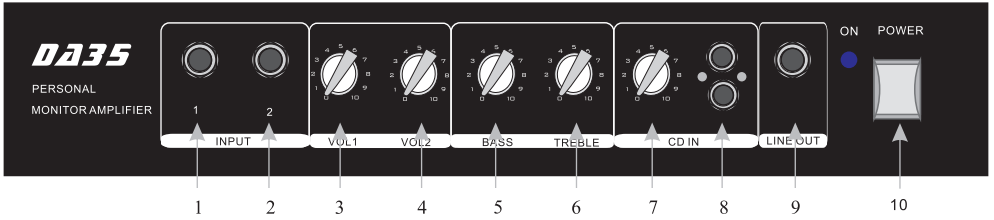

1.INPUT1

For connect of KEYBOARD, DRUM, GUITAR and so on instruments.

2.INPUT2

For connect of KEYBOARD, DRUM, GUITAR and so on instruments

3.VOL1

Sets the volume level for the INPUT1 channel.

4.VOL2

Sets the volume level for the INPUT2 channel.

5.BASS

Controls the low frequency in the machine.

6.TREBLE

Controls the high frequency in the machine.

7.LEVEL

Sets the volume level for the CD IN channel.

8.CD IN

Socket for connection of external CD player.

9.LINE OUT

Sockets for connection to a P.A. system.

10.POWER

Turns the machine on and off.

TECHNICAL SPECIFICATION

| | |
|-----------------------|-----------------------|
| Power Output: | 35W |
| Power Requirements: | 230VAC50HZ/110VAC60HZ |
| Dimensions (H×W×D): | 430×390×340(mm) |
| System Hum and Noise: | ≥70dB |
| Input impedance: | >1MΩ |
| Speakers impedance: | 4Ω(10" speaker) |

1. 輸入插孔1 (INPUT1):

連接鍵盤、電鼓、吉它等樂器信號

2. 輸入插孔2 (INPUT2):

連接鍵盤、電鼓、吉它等樂器信號

3. 輸入插孔1 音量調節 (VOL1):

控制輸入插孔一的音量

4. 輸入插孔2 音量調節 (VOL2):

控制輸入插孔二的音量

5. 低音調節 (BASS):

調節輸入一和輸入二的低音頻率

6. 高音調節 (TREBLE):

調節輸入一和輸入二的高音頻率

7. CD音量調節 (CDIN):

用于調節外接音頻信號的音量

8. CD輸入 (CDIN):

用于連接外接音頻信號，俗稱蓮花座

9. 線性輸出插口 (LINEOUT):

用于連接調音臺，錄音設備

10. 電源開關 (POWER):

用于交流電源的接通以及切斷

主要技術指標:

| | |
|--------------|-----------------------|
| 輸出功率: | 35W |
| 電源: | 230VAC50HZ/110VAC60HZ |
| 外型尺寸(H×W×D): | 430×390×340(mm) |
| 信噪比: | ≥70dB |
| 輸入阻抗: | >1MΩ |
| 揚聲器阻抗: | 4Ω(10" speaker) |